

Flow Measurement

SITRANS FC (Coriolis)



Flowmeter systems / SITRANS FC520/FC540

Overview

The flowmeter systems of the SITRANS FC500 series are the universal Coriolis multi-parameter flowmeter for routine and hygienic applications.

They are formed by one FCS500 sensor and one FCT transmitter:

- SITRANS FC520 is the combination of the FCS500 sensor and the FCT020 transmitter
- SITRANS FC540 is the combination of the FCS500 sensor and the FCT040 transmitter

Features:

- Dual curved AISI 316L stainless steel measuring tubes
- Process connection: flange, thread, or a selection of hygienic fittings
- Nominal sizes: DN 10 to DN 80
- Connection sizes: DN 8 to DN 125 ($\frac{3}{8}$ " to 5")
- Nominal flow rates: 1 600 to 170 000 kg/h (3 527 to 374 786 lb/h)
- FCS500 sensors can be combined with compact or remote transmitters
- Versatility with superior turndown and low pressure loss
- Hygienic specification for food and beverage, biotechnological and pharmaceutical applications



FC520/540 Coriolis flowmeter

Benefits

Product features aligned to user value targets

	User value targets	SITRANS FC features and solutions
Engineering and project management	• Reduce engineering investment • Cut specification effort • Minimize project expenditure • Decrease the spending on each measurement point • Eliminate function duplication • Reduce number of suppliers	• Siemens project teams offer complimentary evaluation of customer specifications, provided by regional and HQ experts • Simple product selection using intuitive sizing software • One SITRANS FC device can typically provide 3 to 6 individual measurements, all transmitted via digital communication, when planned during pre-project design • Added value functions: batch control, viscosity, thermal energy, concentration measurement (Fraction) of two-component solutions, and pressure compensation
Installation	• Reduce footprint and transport outlay of OEM machinery • Lower installation complexity • Avoid costly modifications of existing plant	• Can be installed in horizontal or vertical (self-draining) pipes • Twin tube bend design delivers strong signal to noise characteristic resistant to external influence, so install in tight spaces with no inlet and outlet restrictions • Adaptable to existing pipes: typically, 3 or 4 connection sizes for each sensor size • Flexible selection of traditional inputs, outputs, and digital communications
Configuration and commissioning	• Shorter commissioning schedules with lower costs • Faster start-up with reduced outgoings	• Easy setup wizard delivers working meters straight after start-up • microSD card stores sensor calibration data and default setup • Simple configuration using Process Device Manager (PDM) • Siemens device-specific faceplates simplify operation in plantwide control systems
Efficient plant operation	• Improve finished product consistency to reduce waste • Keep process performance when scaling production up or down • Optimize process control • Improve finished product quality enabling higher levels of profit • Reduce downtime with fast resolution of process upsets • Improve asset performance	• SITRANS FC meters are calibrated in rigs accredited to EN/ISO 17025 to ensure consistently high performance of flow, density, and concentration measurements • First-class zero-point quality maintains high accuracy into the low flow region • High sensitivity and intelligent dynamic range keeps the measurement active in demanding high fluid damping cases • Designed-in resilience to process extremes • Self-verification alerts to potential performance issues due to unplanned process events, for example gas or vapor breakout or solid deposits building up in the tubes • Diagnostic data via local menu or PDM is backed by Siemens application experts • Intelligent Siemens SITRANS IQ apps for continuing asset evaluation
Maintenance and asset management	• Optimize technician training • Reduce cost of spare parts • Increase predictive maintenance • Reduce production downtime and associated costs • Decrease unplanned maintenance • Maximize asset value	• Simple product design with interchangeable modular parts • microSD card loads sensor-specific data to deliver fast service exchange • Self-verification: tube health check monitors key diagnostics, including tube stiffness, driver and pickups; the user defines verification frequency and alarm behavior • Verification results indicate whether preventive maintenance action is required • Siemens SIMATIC Maintenance Station uses cyclical acquisition to provide life cycle reports and intelligent preventive maintenance strategies

Flow Measurement
SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Benefits (continued)

	User value targets	SITRANS FC features and solutions
Industry compliance	• Cut effort required to comply with Industry-specific demands • Reduce resources needed to maintain regulatory compliance	• Food and beverage sector covered with EHEDG and 3-A approvals, polished tubes • Global hazardous area approvals for international plant duplications • Common and emerging digital networks covered: HART, , or over • Class-leading safety: SIL2/SIL3, secondary containment, PED,

Application

Application examples for SITRANS FC multi-parameter meters across diverse industry sectors

Chemical and petrochemical Bulk chemicals Industrial gases Polymers Agrochemicals Fine chemicals Aroma chemicals	• Transfer, loading and unloading of bulk chemicals • Concentration control of acids and alkalis (process optimization) • Accurate mass or volume flow of feed chemicals to in-line blending systems • Accurate mass flow and density (quality) of reactor fluid feeds catalyst • Chemical recovery • Mass balance optimization • Compressed and cryogenic gases • Lubricating oil blending and dosing • High accuracy measurement of critical fluid components • Low flow control in pilot plants and R&D facilities
Food and beverage Food processing Dairies Breweries Distilleries Confectionary Soft drinks Animal feed plants OEM	• Accurate bulk transfer (mass or volume) of all dairy products: milk, cream, whey and yoghurt • Fat concentration in cream • Flow, density, temperature and concentration (Plato) during all fermentation processes • Flow, density, temperature and sugar concentration (Brix) in soft drink processing • Distilled spirits – % alcohol by volume (ABV), liters of pure alcohol, volume transfer, blending, batch and column still optimization and energy management, cask filling, tanker loading • Flow and density of fruit juices and pulps • Mixing and inventory control of confectionary ingredients, e.g. chocolate, syrup, oils, flavors • Metering pump control • Oils, fats enzymes dosing in animal feed plants • CO₂ dosing • CIP liquids • Bottling of beer, spirits, wine, soft drinks, etc. • Bulk sugar processing – molasses, sugar slurries, density, Brix of finished product
Oil and gas Offshore/onshore Upstream/downstream Pipelines Distribution networks Refineries Skid manufacturers	• Loading/unloading of hydrocarbons (e.g. crude oil, bitumen) from/to ship, road tanker, rail car • High pressure chemical injection • High pressure low flow gas • Net oil computing • Gas void fraction • Filling of gas bottles • Furnace control • Test separators • LPG, natural gas hydration • Well-head water-cut monitoring • All hydrocarbon fluids in refineries • Metrology, custody transfer • Drilling mud • Oil well cementing and hydrofracturing

Application (continued)

Application examples for SITRANS FC multi-parameter meters across diverse industry sectors

Life sciences Pharmaceutical Bio	• High accuracy flow and batching of bioreactor feeds • Solvent flow rate, density and batching • Flow of demineralized and deionized water • Solvents and fish oils used in high grade omega 3 oils • Precision coatings • Vacuum thin film coating
Household and personal care Detergents Cosmetics	• Blending and batching of detergent ingredients • Tanker loading and unloading • Salt concentration • Reliable measurement of aerated liquids
Automotive and aeronautical Vehicle manufacturing Paint Engine testing OEM	• Fuel injection nozzle and pump testing • Filling of under bonnet fluid reservoirs, air conditioning, coolant • Fuel flow and density measurement in engine test beds • Checking for air in oil using high accuracy density measurement • Paint spray robots – requires accurate and fast measurements • Aircraft fuel loading (kerosene) • High pressure flow used in turbine blade manufacture
Power and energy Renewable Hydrogen	• Boiler fuel flow and burner control • Turbine fuel flow • Glycol flow and concentration • Bioethanol
Marine OEM Shipbuilders	• Fuel consumption management • Boiler control • Bunkering management • Density used to indicate fuel quality
Pulp, paper and textiles	• Accurate dosing of dyes and chemicals
Water and environmental	• Dosing of chemicals for water treatment • Chemical concentration for water quality control

Flow Measurement


SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540


Design

Design options and related temperature range for FC500 series

Design version	Transmitter style	Process fluid temperature range
Non-hygienic, flange or thread, standard neck	Compact	Standard [-50 ... +150 °C (-58 ... +302 °F)]
	Remote	Standard [-70 ... +200 °C (-94 ... +392 °F)]
Hygienic, thread, polished wetted parts, standard neck	Compact	Standard [-40 ... +140 °C (-58 ... +284 °F)]
	Remote	Standard [-70 ... +140 °C (-94 ... +284 °F)]
Hygienic, clamp, polished wetted parts, standard neck	Compact	Standard [-10 ... +140 °C (14 ... 284 °F)]
	Remote	Standard [-10 ... +140 °C (14 ... 284 °F)]

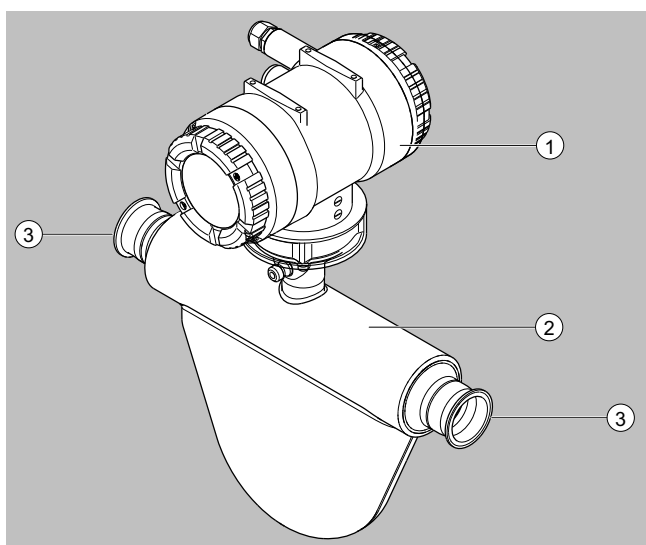

FC5500 sensor with compact transmitter (hygienic version)

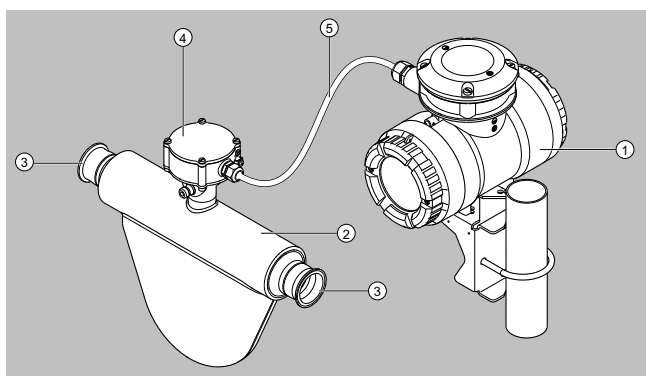

FC5500 sensor with remote transmitter (hygienic version)

- 1 Transmitter
- 2 FCS500 sensor
- 3 Process connection
- 4 Sensor terminal box
- 5 Connecting cable


Design (continued)

Installation guidelines

FC500 series flowmeters can be mounted horizontally, vertically and at an incline. The measuring tubes should be filled with the fluid during flow measurement as entrained gas may result in errors in measurement. Straight pipe runs at inlet or outlet are usually not required.

Avoid the following installation locations and positions:

- Measuring tubes as highest point in piping when measuring liquids
- Measuring tubes as lowest point in piping when measuring gases
- Immediately in front of a free pipe outlet in a downpipe
- Lateral positions

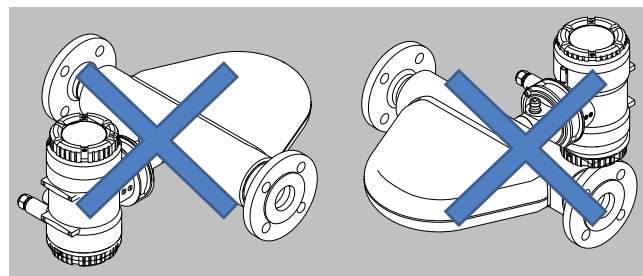

Avoid measuring tubes in sideways position resulting in possible non-homogeneous fluid separation

Function

Compatible fluids

- Liquids
- Gases
- Mixtures, solutions, emulsions, suspensions, and slurries

Primary measured variables

- Mass flow
- Density
- Temperature

Based on the primary measured quantities, the transmitter also calculates

- Volume flow
- Percent concentration (fraction) of a two-component mixture (FCT040 only)
- Partial component flow rate (net flow) of a mixture consisting of two components (FCT040 only)

Bi-directional operation

The mass flow, volume flow, and net flow measurements can be bi-directional.

Measurement variables for NTEP approval

- Mass flow uni-directional
- Volume flow uni-directional

Feature overview

- Energy-efficient low pressure loss design with short tube paths and large tube diameter
- Cost-effective short face-to-face length or customized installation length options
- Batching function with batch leakage detection and batch control by transmitter for precise dosing
- Accurate density measurement and up to four advanced Concentration Measurement data sets
- Benefit from Viscosity function and capability to handle high viscous process fluids
- Hygienic design, self-draining in vertical installation, with hygienic approval options

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Selection and ordering data

SITRANS FC520/540 (Standard and Hygienic)	Article No. 7ME445	● - ● ● ● ● ● - ● ● ● ● - ● ● ●										Order code ● ● ●		
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.														
Transmitter variant														
None (spare sensor)		0												
Coriolis sensor FCS500 with transmitter FCT020		2												
Coriolis sensor FCS500 with transmitter FCT040		4												
SITRANS FC spare part transmitter, no sensor included		9										G	3	Y
Sensor size / Connector size														
No sensor (SITRANS FCT transmitter as spare part)			0	A										
Sensor size DN 10 with connection size 3/8"			1	B										
Sensor size DN 10 with connection size ½" DN 15			1	C										
Sensor size DN 10 with connection size 3/4"			1	D										
Sensor size DN 10 with connection size 1" DN 25			1	E										
Sensor size DN 10 with connection size 1 ½" DN 40			1	F										
Sensor size DN 10 with special connection			1	Y										
Sensor size DN 15 with connection size ½" DN 15			2	C										
Sensor size DN 15 with connection size 3/4"			2	D										
Sensor size DN 15 with connection size 1" DN 25			2	E										
Sensor size DN 15 with connection size 1 ½" DN 40			2	F										
Sensor size DN 15 with special connection			2	Y										
Sensor size DN 25 with connection size 1" DN 25			3	E										
Sensor size DN 25 with connection size 1 ½" DN 40			3	F										
Sensor size DN 25 with connection size 2" DN 50			3	G										
Sensor size DN 25 with special connection			3	Y										
Sensor size DN 50 with connection size 1 ½" DN 40			4	F										
Sensor size DN 50 with connection size 2" DN 50			4	G										
Sensor size DN 50 with connection size 2 ½" DN 65			4	H										
Sensor size DN 50 with connection size 3" DN 80			4	J										
Sensor size DN 50 with special connection			4	Y										
Sensor size DN 80 with connection size 3" DN 80			5	J										
Sensor size DN 80 with connection size 4" DN 100			5	K										
Sensor size DN 80 with connection size 5" DN 125			5	L										
Sensor size DN 80 with special connection			5	Y										
Process connection														
No connection (SITRANS FCT transmitter as spare part)				A	0									
EN flange PN 40, suitable for EN 1092-1 type B1, raised face (RF)				A	1									
EN flange PN 100, suitable for EN 1092-1 type B1, raised face (RF)				A	3									
EN flange PN 40, suitable for EN 1092-1 type D, groove				A	5									
EN flange PN 100, suitable for EN 1092-1 type D, groove				A	7									
EN flange PN 40, suitable for EN 1092-1 type E, spigot				B	1									
EN flange PN 100, suitable for EN 1092-1 type E, spigot				B	3									
EN flange PN 40, suitable for EN 1092-1 type F, recess				B	5									
EN flange PN 100, suitable for EN 1092-1 type F, recess				B	7									
ASME flange class 600, suitable for ASME B16.5, ring joint (RJ)				C	3									
ASME flange class 150, suitable for ASME B16.5, raised face (RF)				D	1									
ASME flange class 300, suitable for ASME B16.5, raised face (RF)				D	2									
ASME flange class 600, suitable for ASME B16.5, raised face (RF)				D	3									
Process connection with internal thread G				E	1									
Process connection with internal thread NPT				E	3									
DIN 11851 threaded connection				F	1									
Clamp process connection according to DIN 32676 series A				G	2									
Clamp process connection according to DIN 32676 series C (Tri-clamp)				G	6									
DIN 11864-2 Form A				H	2									
JIS G3447 and ISO 2852 clamp				J	1									
JIS flange 10K, JIS B 2220				L	2									
JIS flange 20K, JIS B 2220				L	4									
Special design request				Y	1									
Tube material (wetted) and max operational temperature														
None (SITRANS FCT transmitter as spare part)					0									
316L, 1.4404 media temperature -50 ... 150 °C (-58 ... 302 °F)					1									

Selection and ordering data (continued)

SITRANS FC520/540 (Standard and Hygienic)	Article No. 7ME445	Order code											
316L, 1.4404 media temperature -50 ... 140 °C (-58 ... 284 °F), polished Ra ≤ 0.8 µm							2						
316L, 1.4404 media temperature -70 ... 200 °C (-94 ... 392 °F)							3						
316L, 1.4404 media temperature -70 ... 140 °C (-94 ... 284 °F), polished Ra ≤ 0.8 µm							4						
Calibration													
No calibration								0					
Massflow 0.1%, density 0.5 g/l								1					
Massflow 0.1%, density 1 g/l								2					
Massflow 0.1%, density 4 g/l								5					
Massflow 0.2%, density 4 g/l								6					
Accuracy for gas please select below								9					
Massflow gas 0.75%											N	1	A
Massflow gas 0.5%											N	2	A
Massflow gas 0.35%											N	3	A
Mounting style, transmitter housing and material													
Compact type with "urethane-cured polyester powder coating" coated aluminum transmitter housing									A				
Compact type with "corrosion protection coating" coated aluminum transmitter housing									B				
Remote type with "urethane-cured polyester powder coating" coated aluminum transmitter housing and standard neck sensor									C				
Remote type with "corrosion protection coating" coated aluminum transmitter housing and standard neck sensor									E				
Remote type stainless steel transmitter and standard neck sensor									G				
Ex approvals													
None										A			
ATEX, explosion group IIC and IIIC										B			
ATEX, explosion group IIB and IIIC										C			
IECEX, explosion group IIC and IIIC										D			
IECEX, explosion group IIB and IIIC										E			
EAC Ex, IIC and IIIC										F			
EAC Ex, IIB and IIIC										G			
FM, groups A B C D E F G										H			
FM, groups C D E F G										J			
INMETRO, explosion group IIC and IIIC										K			
INMETRO, explosion group IIB and IIIC										L			
NEPSI, explosion group IIC and IIIC										M			
NEPSI, explosion group IIB and IIIC										N			
Korea Ex, explosion group IIC and IIIC										P			
Korea Ex, explosion group IIB and for integral type also IIIC										Q			
Local User Interface													
Spare sensor without transmitter, no display applied										0			
No display										1			
With display										3			

	Order code
Further designs	
Please add "-Z" to Article No. and specify order code(s).	
Cable glands	
Metric, no glands (M20)	A10
NPT, no glands (1/2")	A11
Armored cable setup (NPT threads supplied)	A20
NPT, no glands (1/2") steel armored cable	A21
Sensor housing material	
None (SITRANS FCT transmitter as spare part)	B00
Stainless steel 1.4301/304, 1.4404/316L	B01
I/O Configuration Ch1	
None	E00
4-20 mA HART active	E06

	Order code
4-20 mA HART passive	E07
PROFIBUS PA	E10
Modbus RTU RS 485	E14
PROFINET over Ethernet-APL (IS)	E15
I/O Configuration Ch2, Ch3 and Ch4	
Spare sensor without transmitter, all communication types and I/Os apply	F00
1 passive current output, 1 passive pulse or status output	F01
1 passive current output, 2 passive pulse or status outputs	F02
1 passive current output, 1 passive pulse or status outputs, 1 passive NAMUR pulse or status output	F03
1 passive current output, 2 passive NAMUR pulse or status outputs	F04

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Selection and ordering data (continued)

	Order code
1 passive pulse or status output	F11
2 passive pulse or status outputs, 1 passive status output	F12
2 passive pulse or status outputs, 1 voltage-free status input	F13
2 passive pulse or status outputs, 1 active current input	F14
2 passive pulse or status outputs, 1 passive current input	F15
1 passive pulse or status output, 1 passive current output, 1 active current input	F16
1 passive pulse or status output, 1 passive current output, 1 passive current input	F17
1 passive pulse or status output, 1 voltage-free status input, 1 active current input	F18
1 passive pulse or status output, 1 voltage-free status input, 1 passive current input	F19
1 passive pulse or status output, 1 active pulse or status output, 1 voltage-free status input	F20
1 passive pulse or status output, 1 active pulse or status output with pull-up resistor, 1 voltage-free status input	F21
1 active current output, 2 passive pulse or status outputs	F22
1 active current output, 1 passive pulse or status output, 1 voltage-free status input	F23
1 passive pulse or status output	F31
2 passive pulse or status outputs	F32
1 passive pulse or status output, 1 active current input	F33
1 passive pulse or status output, 1 passive current input	F34
1 passive pulse or status output, 1 active pulse or status output	F35
1 passive pulse or status output, 1 active pulse or status output with pull-up resistor	F36
1 passive pulse or status output, 1 active current output	F37
1 passive pulse output	F41
Output CH1 intrinsically safe, 1 passive pulse output	F42
Output CH3 intrinsically safe, 1 passive pulse output	F50
Certificates	
Declaration of compliance with the order 2.1 according to EN 10204	C11
Certificate of Marking Transfer and Raw Material Certificates (Inspection Certificate 3.1 according to EN 10204), including IGC and conform to NACE MR0175 and MR0103	C13
Positive Material Identification of wetted parts, including certificate (Inspection Certificate 3.1 according to EN 10204)	C15
NTEP approval accuracy class 0.3 acc. NIST	C16
Hydrostatic Pressure Test Certificate (Inspection Certificate 3.1 according to EN 10204)	C18
Functional Safety (IEC 61508) - SIL2/3	C20
X-ray inspection of flange weld seam according to DIN EN ISO 17636-1/B, evaluation according to AD 2000 HP 5/3 and DIN EN ISO 5817/C, including certificate	C33
X-ray test according to ASME V	C34

	Order code
WPS according to DIN EN ISO 15809-1; WPQR according to DIN EN ISO 15814-1; WQC according to DIN EN 287-1 or DIN EN ISO 8908-4	C36
Welding procedures and certificate ASME IX	C37
Dye penetrant test of process connection weld seams according to EN ISO 3452-1, including certificate	C38
Dye penetrant test of flange welding according to ASME V, including certificate	C39
Quality Inspection Certificate (Inspection Certificate 3.1 according to EN 10204)	C40
Ferrite test for flange welding acc. DIN EN ISO 8249	C50
Degreasing of wetted surfaces according to ASTM G93-03 (Level C), including test report	C54
3-A product conformity with 3-A certificate and marking, including Surface Roughness wetted parts $Ra \leq 0.8 \mu m$ and Surface Roughness Inspection Certificate	C62
EHEDG product conformity with EHEDG Certificate and marking, including Surface Roughness wetted parts $Ra \leq 0.8 \mu m$ and Surface Roughness Inspection Certificate	C63
Surface Roughness wetted parts $Ra \leq 0.8 \mu m$ and Surface Roughness Inspection Certificate	C61
Combined certificates	
Certification package (C13, C18, C40) including Marking Transfer and raw material certificate, Hydrostatic pressure test and Quality inspection certificate	C80
Certification package (C13, C15, C40) including Marking Transfer and raw material certificate, Positive material identification and Quality inspection certificate	C81
Certification package (C13, C18, C38, C40) including Marking Transfer and raw material certificate, Hydrostatic pressure test, Dye penetration and Quality inspection certificate	C82
Certification package (C13, C15, C18, C36, C38, C40) including Marking Transfer and raw material certificate, Positive material identification, Hydrostatic pressure test, Welding certificates, Dye penetration and Quality inspection certificate	C83
Certification package (C15, C18, C36) including Positive material identification, Hydrostatic pressure test and Welding certificates	C84
Certification package (C34, C37, C39) including X-ray test according to ASME V, Welding procedures and Certificates according to ASME IX and Dye penetrant test of flange welding according to ASME V	C85
Certification package (C13, C18, C34, C37, C39, C40) including Marking Transfer and raw material certificate, Hydrostatic pressure test, X-ray test according to ASME V, Welding procedures and Certificates according to ASME IX, Dye penetrant test of flange welding according to ASME V and Quality inspection certificate	C86
Certification package (C13, C15, C34, C37, C39, C40) including Marking Transfer and raw material certificate, Positive material identification, X-ray test according to ASME V, Welding procedures and Certificates according to ASME IX, Dye penetrant test of flange welding according to ASME V and Quality inspection certificate	C87
Connecting cable type and length	
Without standard connecting cable	L50
5 meter (16.4 ft) remote connecting cable terminated standard gray / Ex blue	L51

Selection and ordering data (continued)

	Order code
10 meter (32.8 ft) remote connecting cable terminated standard gray / Ex blue	L54
15 meter (49.2 ft) remote connecting cable terminated standard gray / Ex blue	L57
20 meter (65.6 ft) remote connecting cable terminated standard gray / Ex blue	L60
30 meter (98.4 ft) remote connecting cable terminated standard gray / Ex blue	L63
without fire retardant connecting cable	L70
5 meter (16.4 ft) remote fire retardant connecting cable not terminated	L71
10 meter (32.8 ft) remote fire retardant connecting cable not terminated	L74
15 meter (49.2 ft) remote fire retardant connecting cable not terminated	L77
20 meter (65.6 ft) remote fire retardant connecting cable not terminated	L80
30 meter (98.4 ft) remote fire retardant connecting cable not terminated	L83
SW functions	
Heat measurement	S11
Tube health check	S12
Batching and filling function	S13
Netoil computing	S14
Viscosity computing function for liquids	S15
Standard concentration measurement	S16
Advanced concentration	S17
Marine approval	
Marine approved DNV, ABS, KR piping class 2	S22
Marine approved DNV, ABS, KR piping class 3	S23
Marine approved LR, MR, TAC piping class 2	S24
Marine approved LR, MR, TAC piping class 3	S25
Marine approved BV piping class 2	S26
Marine approved BV piping class 3	S27
Mounting	
Namur built-in length according to NE132	S31
Country-specific delivery	
Delivery to China including China RoHS mark	W21
Delivery to Korea including KC mark	W22
Delivery to Canada including CRN mark	W26

	Order code
Fraction setup	
PIA: Please select four options	
Sugar / Water 0 ... 85 °Bx, 0 ... 80 °C (32 ... 176 °F)	G01
NaOH / Water 2 ... 50 WT%, 0 ... 100 °C (32 ... 212 °F)	G02
KOH / Water 0 ... 60 WT%, 54 ... 100 °C (129 ... 212 °F)	G03
NH ₄ NO ₃ / Water 1 ... 50 WT%, 0 ... 80 °C (32 ... 176 °F)	G04
NH ₄ NO ₃ / Water 20 ... 70 WT%, 20 ... 100 °C (68 ... 212 °F)	G05
HCl / Water 22 ... 34 WT%, 20 ... 40 °C (68 ... 104 °F)	G06
HNO ₃ / Water 50 ... 67 WT%, 10 ... 60 °C (50 ... 140 °F)	G07
H ₂ O ₂ / Water 30 ... 75 WT%, 4 ... 44 °C (39 ... 111 °F)	G09
Ethylene Glycol / Water 10 ... 50 WT%, -20 ... 40 °C (-4 ... 104 °F)	G10
Amylum = Starch / Water 33 ... 43 WT%, 35 ... 45 °C (95 ... 113 °F)	G11
Methanol / Water 35 ... 60 WT%, 0 ... 40 °C (32 ... 104 °F)	G12
Alcohol / Water 55 ... 100 VOL%, 10 ... 40 °C (50 ... 104 °F)	G20
Sugar / Water 40 ... 80 °Bx, 75 ... 100 °C (167 ... 212 °F)	G21
Alcohol / Water 66 ... 100 WT%, 15 ... 40 °C (59 ... 104 °F)	G30
Alcohol / Water 66 ... 100 WT%, 10 ... 40 °C (50 ... 104 °F)	G37
Tag name	
Tag name plate, SS (max. 16 characters)	Y11
HART/MODBUS software tag No. (max. 8 characters)	Y25
HART/MODBUS software tag No. (max. 32 characters)	Y26
PROFIBUS PA NODE ADDRESS (4 characters HEX)	Y28
PROFIBUS PA SOFTWARE TAG (max. 32 characters)	Y29
Customer installation length	
Customer installation length (mm)	Y30
Calibration	
Predefined 6-Point Accredited Calibration: 10%, 20%, 40%, 60%, 80%, 100% of Q _{nom} . Calibrated Output: Frequency	D62
Special versions	
ID-Number of special design	Y99

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Technical specifications

Mass flow rate of liquids

The mass flow rate characteristics of SITRANS FC meters are defined by the values of zero stability, Q_{flat} , Q_{nom} and Q_{max} .

Zero stability is the maximum allowable flow rate value that can be displayed at zero flow under reference conditions. It is a good indicator of the meter performance as flow rates reduce, and approach zero.

- Q_{flat} is the mass flow rate above which the base accuracy is maintained (0.1% when using FCT040 transmitters).
- Q_{nom} is the nominal mass flow rate of water at reference conditions that would result in a pressure drop of 1 bar (15 psi).
- Q_{max} is the recommended maximum mass flow rate for each sensor size.

For questions regarding expected performance in specific applications, please contact your regional Siemens Measurement Intelligence team.

Flow rate summary by FCS500 sensor size

Nominal size	Zero stability		Q_{flat}		Q_{nom}		Q_{max}	
	kg/h	lb/h	kg/h	lb/min	kg/h	lb/min	kg/h	lb/min
DN 10	0.032	0.070	80.0	2.94	1 600	58.7	2 300	84.4
DN 15	0.090	0.198	235	8.62	4 700	172	7 000	257
DN 25	0.400	0.880	1 000	36.7	20 000	734	29 000	1 064
DN 50	2.55	5.61	2 550	93.6	51 000	1 872	76 000	2 789
DN 80	8.50	18.7	8 500	312	170 000	6 239	255 000	9 359

Performance summary by FCS500 sensor size and transmitter type

Sensor size			DN 10	DN 15	DN 25	DN 50	DN 80
Mass flow (liquids)							
Accuracy	% (of rate)	FCT020	± 0.2	± 0.2	± 0.2	± 0.2	± 0.2
	% (of rate)	FCT040	± 0.1	± 0.1	± 0.1	± 0.1	± 0.1
Zero stability	kg/h (lb/h)		± 0.032 (0.07)	± 0.09 (0.198)	± 0.4 (0.88)	± 2.55 (5.61)	± 8.5 (18.7)
Density (liquids)							
Accuracy	kg/m³ (lb/ft³)	FCT020/FCT040	± 4 (0.25)	± 4 (0.25)	± 4 (0.25)	± 4 (0.25)	± 4 (0.25)
	kg/m3 (lb/ft³)	FCT040	± 0.5 (0.03)	± 0.5 (0.03)	± 0.5 (0.03)	± 0.5 (0.03)	± 1 (0.06)
Mass flow (gases)							
Accuracy	% (of rate)	FCT020	± 0.75	± 0.75	± 0.75	± 0.75	± 0.75
	% (of rate)	FCT040					
	% (of rate)	FCT040	± 0.35	± 0.35	± 0.35	± 0.35	± 0.35
Temperature							
Accuracy	°C (°F)		± 1 (1.8)	± 1 (1.8)	± 1 (1.8)	± 1 (1.8)	± 1 (1.8)

Note:

The accuracy values in the table above are based on reference conditions at the time of calibration and represent the combined measurement uncertainties including sensor, electronic and pulse output interface.

Liquid density calibration is performed when density accuracy of 0.5 kg/m³ (0.03 lb/ft³) is selected in the model code.

Mass flow calibration and density adjustment for liquids

Siemens SITRANS FC Coriolis meters are calibrated in rigs accredited according to the international standard DIN EN ISO/IEC 17025:2018. Each flowmeter comes with a standard calibration certificate.

Mass flow calibration takes place at reference conditions. Specific values are listed in the standard calibration certificate.

Mass flow calibration reference conditions

Fluid	Water
Density	900 ... 1 100 kg/m ³ (56 ... 69 lb/ft ³)
Fluid temperature	10 ... 35 °C (50 ... 95 °F), average temperature: 22.5 °C (72.5 °F)
Ambient temperature	10 ... 35 °C (50 ... 95 °F)
Process pressure	1 ... 5 bar (15 ... 73 psi)

Density calibration reference conditions

Flow condition	Fully developed flow profile
Fluid densities used to obtain density calibration constants	700 kg/m ³ (44 lb/ft ³) 1 000 kg/m ³ (62 lb/ft ³) 1 650 kg/m ³ (103 lb/ft ³)
Fluid temperature	20 °C (68 °F)
Determination of temperature compensation coefficients	20 ... 80 °C (68 ... 176 °F)

Analog output performance specification

Typical additional uncertainty when using the analog current output:

± 0.04% at a nominal mid-range current output of 12 mA, which includes the effects of: Output adjustment, linearity, power supply variation, load resistance variation, short-term and long-term drift for one year, and ambient temperature effect on the transmitter in the range 20 °C ± 30 °C (14 ... 122 °F).

Process pressure effect on flow measurement performance

Changes in operating pressure have a small effect on the mass flow measurement performance. When the pressure changes are very large this effect can be corrected by a dynamic pressure input or a fixed process pressure.

Technical specifications (continued)

Sensor size	Additional flow measurement errors due to change in operating pressure from reference pressure	
	in % of rate per 1 bar variation	in % of rate per 1 psi variation
DN 10	-0.0020	-0.00014
DN 15	-0.0084	-0.00058
DN 25	-0.0109	-0.00075
DN 50	-0.0130	-0.0009
DN 80	-0.0233	-0.0016

Process temperature effect

For mass flow measurement, process fluid temperature effect is defined as the change in sensor flow accuracy due to process fluid temperature change, away from the 20 °C (68 °F) reference condition. Variation in process temperature influences the measuring tube characteristics and this is compensated for using the built-in PT 1000 temperature sensor.

A small flow uncertainty remains in the compensation circuit, defined below.

Uncertainty due to process temperature change: $\pm 0.0009\%$ of mass flow rate per °C ($\pm 0.0005\%$ of mass flow rate per °F)

Temperature effect on zero

Temperature effect on the mass flow zero-point quality can be corrected by zeroing at the process fluid temperature.

Process conditions**Process fluid temperature range**

Design version	Transmitter	Process fluid temperature range
Non-hygienic, flange or thread, standard neck	Compact	Standard [-50 ... +150 °C (-58 ... +302 °F)]
	Remote	Standard [-70 ... +200 °C (-94 ... +392 °F)]
Hygienic, thread, polished wetted parts, standard neck	Compact	Standard [-40 ... +140 °C (-58 ... +284 °F)]
	Remote	Standard [-70 ... +140 °C (-94 ... +284 °F)]
Hygienic, clamp, polished wetted parts, standard neck	Compact	Standard [-10 ... +140 °C (14 ... 284 °F)]
	Remote	Standard [-10 ... +140 °C (14 ... 284 °F)]

Operating pressure


The maximum allowed process pressure depends on the selected process connection and process temperature.

The given process temperature and process pressure ranges are calculated and approved without corrosion or erosion effects.

Pressure versus temperature relationship depending on selected process connection


The following diagrams show the process pressure as a function of process temperature as well as the process connection used (type and size of process connection).

Calculations for ASME flanges are based on ASME B16.5 Material group 2.2 (316/316L dual certified).

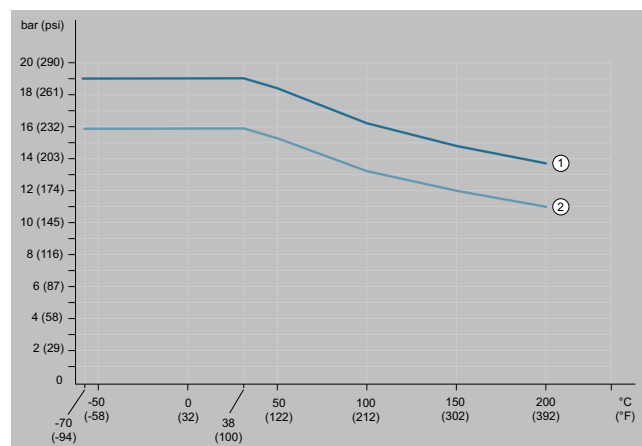ASME class 150

Allowed process pressure as a function of process fluid temperature

- 1 Process connection compatible to ASME B16.5 class 150
- 2 Not used for this product

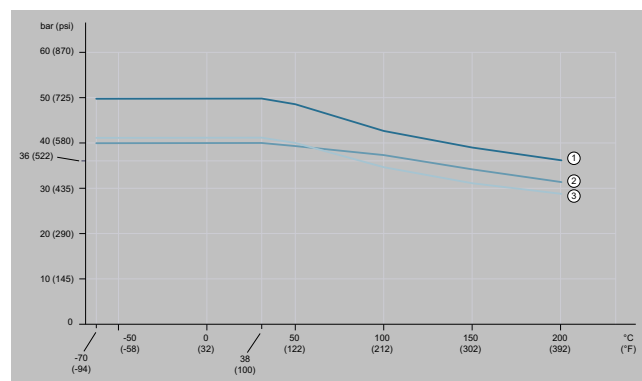ASME class 300, EN PN 40

Allowed process pressure as a function of process fluid temperature

- 1 Process connection compatible to ASME B16.5 class 300
- 2 Process and heat tracing connection compatible to EN 1092-1 PN 40
- 3 Not used for this product


Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Technical specifications (continued)


ASME class 600

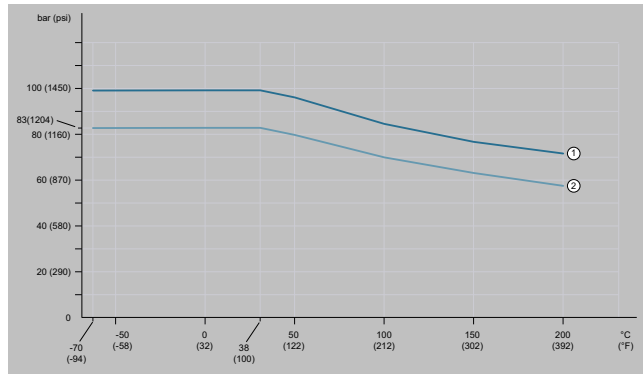

Allowed process pressure as a function of process fluid temperature


- 1 Process connection compatible to ASME B16.5 class 600
- 2 Not used for this product

EN PN100

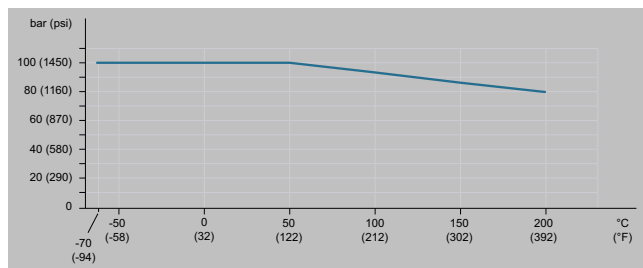

Allowed process pressure as a function of process fluid temperature, compatible to EN 1092-1 PN 100


JIS 10K, JIS 20K

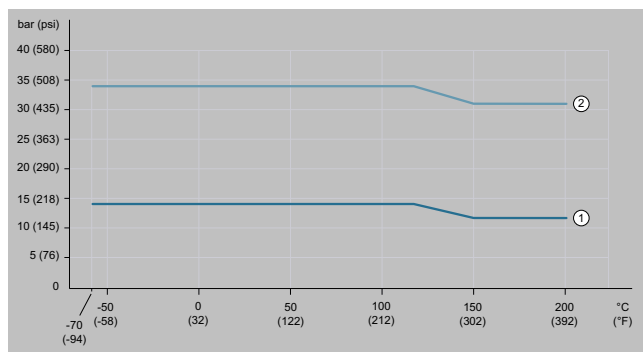

Allowed process pressure as a function of process connection temperature


- 1 Process connection compatible to JIS B 2220 10K
- 2 Process connection compatible to JIS B 2220 20K

Process connection with internal thread G and NPT

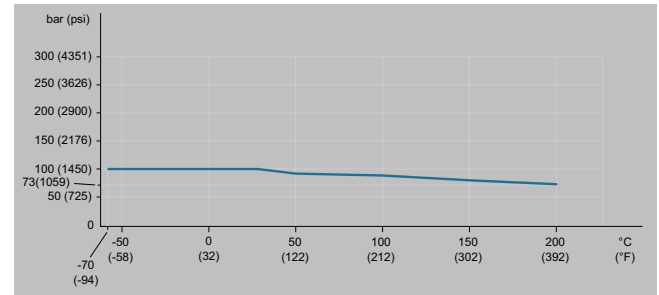

Allowed process pressure as a function of process fluid temperature


Threaded connection according to DIN 11851

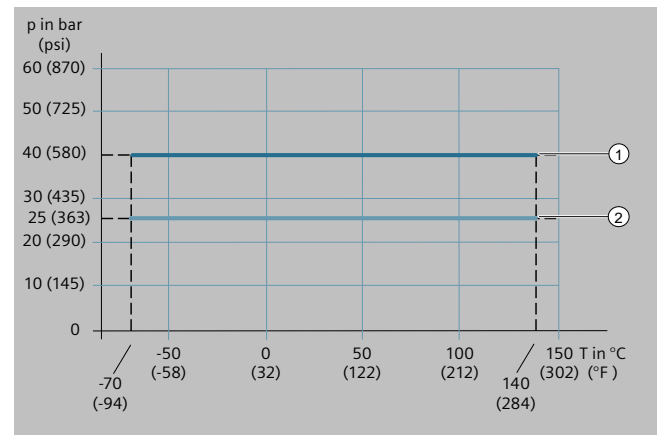

Allowed process pressure as a function of process connection temperature

- 1 Threaded connection compatible to DIN 11851 up to DN 40
- 2 Threaded connection compatible to DIN 11851 from DN 50 to DN 100

Threaded connection according to SMS 1145

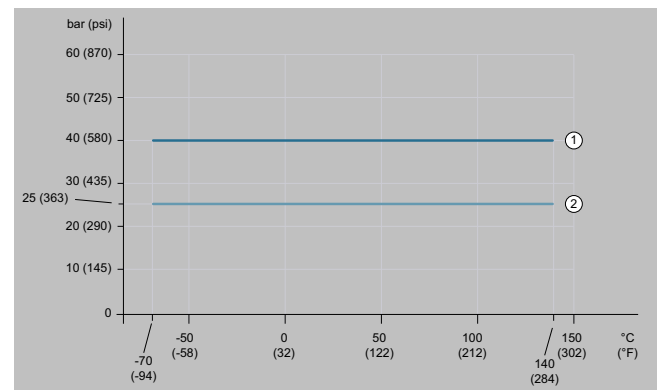


Allowed process pressure as a function of process connection temperature

Technical specifications (continued)

- 1 Threaded sanitary connection for SMS 1145 up to DN 40
- 2 Threaded sanitary connection for SMS 1145 from DN 50 up to DN 80

- 1 Clamp connection compatible to DIN 32676 series C up to 2"
- 2 Clamp connection compatible to DIN 32676 series C above 2"


Clamp process connection according to DIN 32676 series A

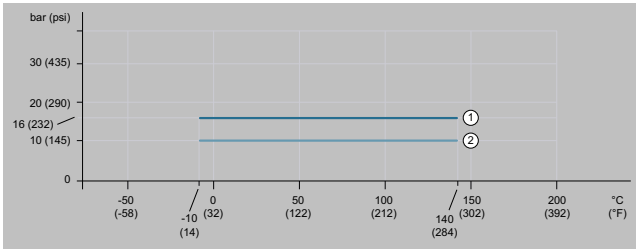

Allowed process pressure as a function of process fluid temperature

- 1 Clamp connection compatible to DIN 32676 series A up to DN 50
- 2 Clamp connection compatible to DIN 32676 series A above DN 50

Clamp process connection according to DIN 32676 series C (Tri-Clamp)

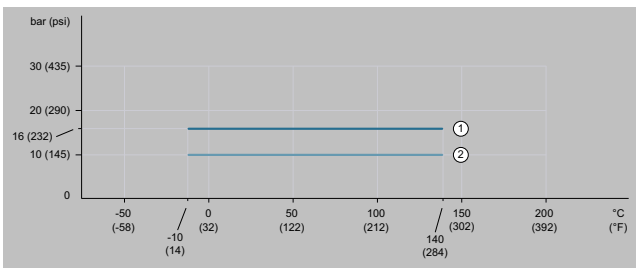

Allowed process pressure as a function of process fluid temperature

Ambient conditions

Allowed ambient and storage temperature of SITRANS FC500 series is influenced by the temperature specification of FCS500 sensor, FCTOX0 transmitter and the interconnecting cable.

Ambient temperature

Device surrounding air temperature is considered as ambient temperature. If the device is operating outdoors make sure that the solar irradiation does not increase the surface temperature of the device higher than the allowed maximum ambient temperature. Transmitter display has limited legibility below -20 °C (-4 °F).

The sensor ambient temperature limits may also be influenced by the process fluid temperature, details shown in the chapter "Sensors" (Technical specifications).

Maximum ambient temperature ranges for FC500 series

Cable type	Transmitter style	Device	Ambient temperature range
None	Compact	Sensor and transmitter	-40 ... +60 °C (-40 ... +140 °F)
Standard cable	Remote	Sensor	-50 ... +80 °C (-58 ... +176 °F)
		Transmitter	-40 ... +60 °C (-40 ... +140 °F)
Fire retardant cable	Remote	Sensor	-35 ... +80 °C (-31 ... +176 °F)
		Transmitter	-35 ... +60 °C (-31 ... +140 °F)

Ambient temperature range for NTEP custody transfer approval

Cable type	Transmitter style	Device	Ambient temperature range
None	Compact	Sensor and transmitter	-40 ... +50 °C (-40 ... +122 °F)
Standard cable	Remote	Sensor	-50 ... +80 °C (-58 ... +176 °F)
		Transmitter	-40 ... +50 °C (-40 ... +122 °F)
Fire retardant cable	Remote	Sensor	-35 ... +80 °C (-31 ... +176 °F)
		Transmitter	-35 ... +50 °C (-31 ... +122 °F)

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Technical specifications (continued)

Maximum storage temperature ranges for FC500 series

Cable type	Transmitter style	Device	Storage temperature range
None	Compact	Sensor and transmitter	-40 ... +60 °C (-40 ... +140 °F)
Standard cable	Remote	Sensor	-50 ... +80 °C (-58 ... +176 °F)
		Transmitter	-40 ... +60 °C (-40 ... +140 °F)
Fire retardant cable	Remote	Sensor	-35 ... +80 °C (-31 ... +176 °F)
		Transmitter	-35 ... +60 °C (-31 ... +140 °F)

Temperature specification of FC500 series Ex versions located in hazardous areas

Please select appropriate equipment in accordance with the laws and regulations of the relevant country/region, when it is used in a location where explosive atmospheres may be present.

The maximum ambient and process fluid temperatures depending on explosion groups and temperature classes can be determined via the SITRANS FC order code together with the Ex code (see the corresponding explosion proof type manual).

Note:

The maximum process fluid temperature could be further restricted due to process connection type. Refer to curves above under the heading, "Allowed ambient temperature for FCS500 sensors".

FCS500 nominal sizes DN 10 and DN 15, compact transmitter

Ex approvals:

All gas groups: ATEX, IEC Ex, FM, EAC Ex, NEPSI, Korea Ex, INMETRO

Temperature class	Maximum process temperature	Maximum ambient temperature
T6	47 °C (116 °F)	43 °C (109 °F)
T5	62 °C (143 °F)	58 °C (136 °F)
T4	99 °C (210 °F)	60 °C (140 °F)
T3	150 °C (302 °F)	60 °C (140 °F)
T2	150 °C (302 °F)	60 °C (140 °F)
T1	150 °C (302 °F)	60 °C (140 °F)

FCS500 nominal size DN 25, compact transmitter

Ex approvals:

All gas groups: ATEX, IEC Ex, FM, EAC Ex, NEPSI, Korea Ex, INMETRO

Temperature class	Maximum process temperature	Maximum ambient temperature
T6	54 °C (129 °F)	54 °C (129 °F)
T5	68 °C (154 °F)	60 °C (140 °F)
T4	107 °C (224 °F)	60 °C (140 °F)
T3	150 °C (302 °F)	60 °C (140 °F)
T2	150 °C (302 °F)	60 °C (140 °F)
T1	150 °C (302 °F)	60 °C (140 °F)

FCS500 nominal size DN 50, compact transmitter

Ex approvals:

- Gas groups IIC and IIIC: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO
- Gas groups A, B, C, D, E, F & G: FM

Temperature class	Maximum process temperature	Maximum ambient temperature
T6	64 °C (147 °F)	40 °C (104 °F)
T5	80 °C (176 °F)	55 °C (131 °F)
T4	117 °C (224 °F)	60 °C (140 °F)
T3	150 °C (302 °F)	60 °C (140 °F)
T2	150 °C (302 °F)	60 °C (140 °F)
T1	150 °C (302 °F)	60 °C (140 °F)

Technical specifications (continued)Ex approvals:

- Gas groups IIB and IIIC: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO
- Gas groups C, D, E, F & G: FM

Temperature class	Maximum process temperature	Maximum ambient temperature
T6	64 °C (147 °F)	44 °C (111 °F)
T5	80 °C (176 °F)	59 °C (138 °F)
T4	117 °C (242 °F)	60 °C (140 °F)
T3	150 °C (302 °F)	60 °C (140 °F)
T2	150 °C (302 °F)	60 °C (140 °F)
T1	150 °C (302 °F)	60 °C (140 °F)

FCS500 nominal size DN 80, compact transmitterEx approvals:

All gas groups: ATEX, IEC Ex, FM, EAC Ex, NEPSI, Korea Ex, INMETRO

Temperature class	Maximum process temperature	Maximum ambient temperature
T6	68 °C (154 °F)	39 °C (102 °F)
T5	83 °C (181 °F)	54 °C (129 °F)
T4	119 °C (246 °F)	60 °C (140 °F)
T3	150 °C (302 °F)	60 °C (140 °F)
T2	150 °C (302 °F)	60 °C (140 °F)
T1	150 °C (302 °F)	60 °C (140 °F)

FCS500 nominal sizes DN 10 and DN 15, remote transmitterEx approvals:

All gas groups: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO

Temperature class	Maximum process temperature	Maximum ambient temperature	
		Standard cable	Fire retardant cable
T6	47 °C (116 °F)	46 °C (114 °F)	46 °C (114 °F)
T5	62 °C (143 °F)	61 °C (141 °F)	61 °C (141 °F)
T4	99 °C (210 °F)	80 °C (176 °F)	74 °C (165 °F)
T3	162 °C (323 °F)	74 °C (165 °F)	56 °C (132 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

Ex approvals:

All gas groups: FM

Temperature class	Maximum process temperature	Maximum ambient temperature	
		Standard cable	Fire retardant cable
T6	47 °C (116 °F)	46 °C (114 °F)	46 °C (114 °F)
T5	62 °C (143 °F)	61 °C (141 °F)	61 °C (141 °F)
T4	99 °C (210 °F)	80 °C (176 °F)	70 °C (158 °F)
T3	162 °C (323 °F)	74 °C (165 °F)	56 °C (132 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

FCS500 nominal size DN 25, remote transmitterEx approvals:

All gas groups: ATEX, IEC Ex, FM, EAC Ex, NEPSI, Korea Ex, INMETRO

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Technical specifications (continued)

Temperature class	Maximum process temperature	Maximum ambient temperature Standard cable	Fire retardant cable
T6	54 °C (129 °F)	54 °C (129 °F)	54 °C (129 °F)
T5	68 °C (154 °F)	68 °C (154 °F)	68 °C (154 °F)
T4	107 °C (224 °F)	80 °C (176 °F)	66 °C (150 °F)
T3	176 °C (348 °F)	68 °C (154 °F)	51 °C (123 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

FCS500 nominal size DN 50, remote transmitter

Ex approvals:

- Gas groups IIC and IIIC: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO
- Gas groups A, B, C, D, E, F & G: FM

Temperature class	Maximum process temperature	Maximum ambient temperature Standard cable	Fire retardant cable
T6	64 °C (147 °F)	42 °C (107 °F)	42 °C (107 °F)
T5	80 °C (176 °F)	57 °C (134 °F)	57 °C (134 °F)
T4	117 °C (242 °F)	80 °C (176 °F)	66 °C (150 °F)
T3	185 °C (365 °F)	68 °C (154 °F)	50 °C (122 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

Ex approvals:

- Gas groups IIB and IIIC: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO
- Gas groups C, D, E, F & G: F

Temperature class	Maximum process temperature	Maximum ambient temperature Standard cable	Fire retardant cable
T6	64 °C (147 °F)	46 °C (114 °F)	46 °C (114 °F)
T5	80 °C (176 °F)	61 °C (141 °F)	61 °C (141 °F)
T4	117 °C (242 °F)	80 °C (176 °F)	66 °C (150 °F)
T3	185 °C (365 °F)	66 °C (150 °F)	50 °C (122 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

FCS500 nominal size DN 80, remote transmitter

Ex approvals:

- All gas groups: ATEX, IEC Ex, EAC Ex, NEPSI, Korea Ex, INMETRO

Temperature class	Maximum process temperature	Maximum ambient temperature Standard cable	Fire retardant cable
T6	68 °C (154 °F)	40 °C (104 °F)	40 °C (104 °F)
T5	83 °C (181 °F)	55 °C (131 °F)	55 °C (131 °F)
T4	119 °C (246 °F)	80 °C (176 °F)	66 °C (150 °F)
T3	185 °C (365 °F)	66 °C (150 °F)	50 °C (122 °F)
T2	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)
T1	200 °C (392 °F)	60 °C (140 °F)	46 °C (114 °F)

Technical specifications (continued)

Additional ambient and environmental specifications

Specification	Rating/level of compliance
Relative humidity	0 ... 95%
Ingress protection	IP66 or IP67 with suitable cable glands
Environmental pollution	Pollution degree 4 in accordance with EN 61010-1 whilst in operation
Maximum altitude	2 000 m (6 600 ft) above mean sea level (MSL)
Mechanical load	• Transmitter: 10 ... 500 Hz, 1g • Sensor: 10 ... 500 Hz, 1g according to IEC 60068-2-6

Specification	Rating/level of compliance
Electromagnetic (EMC) Immunity	• EN IEC 61326-1, Table 2 • EN IEC61326-2-3 • EN IEC 61326-2-5 • NAMUR NE 21 recommendation • DNV-CG-0339 section 3, chapter 14
Surge Immunity Emission	• EN 61000-4-5 for lightning protection • EN IEC 61000-3-2, Class A (harmonic current emissions) • EN IEC 61000-3-3, Class A (voltage fluctuations) • Immunity assessment criterion: output signal fluctuation is within $\pm 1\%$ of the output span
Overvoltage	Category II according to EN IEC 61010-1


Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Dimensional drawings

Drawings, dimensions and weight for FCS500 sensors (non-hygienic versions)

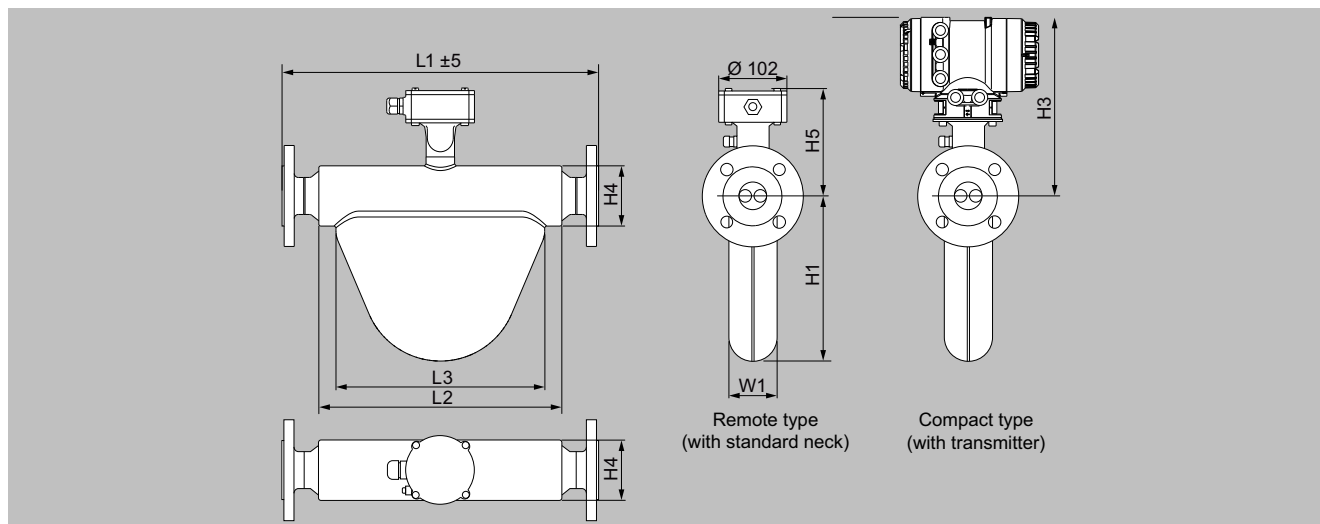

FCS500 sensor non hygienic, dimensions in mm

FCS500 sensor dimensions (non-hygienic versions)

Nominal size	L2	L3	H1	H3	H4	H5	W1
	Dimensions in mm (inch)						
DN 10	190 (7.5)	165 (6.5)	117 (4.6)	268 (10.6)	56 (2.2)	138 (5.4)	42 (1.7)
DN 15	227 (8.9)	195 (7.7)	145 (5.7)	277 (10.9)	71 (2.8)	148 (5.8)	50 (2)
DN 25	361 (14.2)	310 (12.2)	245 (9.6)	289 (11.4)	90 (3.5)	159 (6.3)	72 (2.8)
DN 50	455 (17.9)	400 (15.7)	333 (13.1)	296 (11.7)	102 (4)	167 (6.6)	96 (3.8)
DN 80	682 (26.9)	620 (24.4)	482 (19)	330 (13)	168 (6.6)	201 (7.9)	150 (5.9)

Overall length L1 and weight

The overall length of the sensor depends on the selected process connection (type and size). The following tables list the overall length and weight as functions of the individual process connection.

The weights in the tables are for the remote type. Additional weight for the compact type: up to 3.2 kg (7.1 lb)

L1 dimension and weight with process connections according to ASME B16.5 (AISI 316/AISI 316L)

Process connection size and type	FCS500 sensor nominal size									
	DN 10		DN 15		DN 25		DN 50		DN 80	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
ASME ½" class 150, raised face (RF)	280 (11)	6 (13)	320 (12.6)	8 (18)	n/a	n/a	n/a	n/a	n/a	n/a
ASME ½" class 300, raised face (RF)	280 (11)	6.4 (14)	320 (12.6)	8.4 (18)	n/a	n/a	n/a	n/a	n/a	n/a
ASME ½" class 600, raised face (RF)	290 (11.4)	6.7 (15)	330 (13)	8.7 (19)	n/a	n/a	n/a	n/a	n/a	n/a
ASME ½" class 600, ring joint (RJ)	290 (11.4)	6.6 (15)	330 (13)	8.6 (19)	n/a	n/a	n/a	n/a	n/a	n/a
ASME 1" class 150, raised face (RF)	280 (11)	6.9 (15)	320 (12.6)	8.9 (20)	490 (19.3)	15.7 (35)	n/a	n/a	n/a	n/a
ASME 1" class 300, raised face (RF)	280 (11)	7.9 (17)	320 (12.6)	9.9 (22)	490 (19.3)	16.7 (37)	n/a	n/a	n/a	n/a
ASME 1" class 600, raised face (RF)	300 (11.8)	8.3 (18)	340 (13.4)	10.3 (23)	500 (19.7)	17 (38)	n/a	n/a	n/a	n/a
ASME 1" class 600, ring joint (RJ)	300 (11.8)	8.4 (19)	340 (13.4)	10.4 (23)	500 (19.7)	17.2 (38)	n/a	n/a	n/a	n/a
ASME 1½" class 150, raised face (RF)	290 (11.4)	7.8 (17)	330 (13)	9.8 (22)	470 (18.5)	16.5 (36)	620 (24.4)	25.7 (57)	n/a	n/a

Dimensional drawings (continued)

Process connection size and type	FCS500 sensor nominal size									
	DN 10 L1 in mm (inch)	Weight in kg (lb)	DN 15 L1 in mm (inch)	Weight in kg (lb)	DN 25 L1 in mm (inch)	Weight in kg (lb)	DN 50 L1 in mm (inch)	Weight in kg (lb)	DN 80 L1 in mm (inch)	Weight in kg (lb)
ASME 1½" class 300, raised face (RF)	290 (11.4)	10.1 (22)	330 (13)	12.1 (27)	480 (18.9)	19 (42)	620 (24.4)	28.1 (62)	n/a	n/a
ASME 1½" class 600, raised face (RF)	310 (12.2)	11.5 (25)	350 (13.8)	13.5 (30)	500 (19.7)	20 (44)	630 (24.8)	28.9 (64)	n/a	n/a
ASME 1½" class 600, ring joint (RJ)	310 (12.2)	11.4 (25)	350 (13.8)	13.4 (30)	500 (19.7)	20 (44)	630 (24.8)	29.1 (64)	n/a	n/a
ASME 2" class 150, raised face (RF)	n/a	n/a	n/a	n/a	480 (18,9)	18.1 (40)	580 (22.8)	26.8 (59)	n/a	n/a
ASME 2" class 300, raised face (RF)	n/a	n/a	n/a	n/a	480 (18,9)	19.7 (43)	580 (22.8)	28.3 (62)	n/a	n/a
ASME 2" class 600, raised face (RF)	n/a	n/a	n/a	n/a	510 (20.1)	21.3 (47)	610 (24)	30.5 (67)	n/a	n/a
ASME 2" class 600, ring joint (RJ)	n/a	n/a	n/a	n/a	510 (20.1)	21.8 (48)	610 (24)	30.3 (67)	n/a	n/a
ASME 2½" class 150, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	29.8 (66)	n/a	n/a
ASME 2½" class 300, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	31.3 (69)	n/a	n/a
ASME 2½" class 600, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	610 (24)	33.4 (74)	n/a	n/a
ASME 2½" class 600, ring joint (RJ)	n/a	n/a	n/a	n/a	n/a	n/a	610 (24)	33.8 (74)	n/a	n/a
ASME 3" class 150, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	580 (23.3)	30.9 (68)	870 (34.3)	71.2 (157)
ASME 3" class 300, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	590 (22.8)	34.5 (76)	880 (34.6)	75 (165)
ASME 3" class 600, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	630 (24.8)	37.8 (83)	900 (35.4)	77.7 (171)
ASME 3" class 600, ring joint (RJ)	n/a	n/a	n/a	n/a	n/a	n/a	610 (24)	38.4 (85)	900 (35.4)	78.3 (173)
ASME 4" class 150, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	74.4 (164)
ASME 4" class 300, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	81.8 (180)
ASME 4" class 600, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	920 (36.2)	94 (207)
ASME 4" class 600, ring joint (RJ)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	920 (36.2)	94.6 (209)
ASME 5" class 150, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	870 (34.3)	77 (170)
ASME 5" class 300, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	890 (35)	89.4 (197)
ASME 5" class 600, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	920 (36.2)	114.2 (252)
ASME 5" class 600, ring joint (RJ)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	920 (36.2)	114.9 (253)

L1 dimension and weight with process connections according to EN 1092-1 (AISI 316L)

Process connection size and type	FCS500 sensor nominal size									
	DN 10 L1 in mm (inch)	Weight in kg (lb)	DN 15 L1 in mm (inch)	Weight in kg (lb)	DN 25 L1 in mm (inch)	Weight in kg (lb)	DN 50 L1 in mm (inch)	Weight in kg (lb)	DN 80 L1 in mm (inch)	Weight in kg (lb)
EN DN 15 PN 40 type B1, raised face (RF)	280 (11)	6.6 (14)	320 (12.6)	8.6 (19)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 40 type D, with groove	280 (11)	6.4 (14)	320 (12.6)	8.4 (18)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 40 type E, with spigot	280 (11)	6.3 (14)	320 (12.6)	8.3 (18)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 40 type F, with recess	280 (11)	6.5 (14)	320 (12.6)	8.5 (19)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 100 type B1, raised face (RF)	290 (11.4)	7.4 (16)	330 (13)	9.4 (21)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 100 type D, with groove	290 (11.4)	7.4 (16)	330 (13)	9.4 (21)	n/a	n/a	n/a	n/a	n/a	n/a

Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Dimensional drawings (continued)

Process connection size and type	FCS500 sensor nominal size									
	DN 10 L1 in mm (inch)	Weight in kg (lb)	DN 15 L1 in mm (inch)	Weight in kg (lb)	DN 25 L1 in mm (inch)	Weight in kg (lb)	DN 50 L1 in mm (inch)	Weight in kg (lb)	DN 80 L1 in mm (inch)	Weight in kg (lb)
EN DN 15 PN 100 type E, with spigot	290 (11.4)	7.1 (16)	330 (13)	9.1 (20)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 15 PN 100 type F, with recess	290 (11.4)	7.3 (16)	330 (13)	9.3 (21)	n/a	n/a	n/a	n/a	n/a	n/a
EN DN 25 PN 40 type B1, raised face (RF)	280 (11)	7.5 (17)	320 (12.6)	9.5 (21)	490 (19.3)	16.4 (36)	n/a	n/a	n/a	n/a
EN DN 25 PN 40 type D, with groove	280 (11)	7.5 (17)	320 (12.6)	9.5 (21)	490 (19.3)	16.3 (36)	n/a	n/a	n/a	n/a
EN DN 25 PN 40 type E, with spigot	280 (11)	7.2 (16)	320 (12.6)	9.2 (20)	490 (19.3)	16.1 (35)	n/a	n/a	n/a	n/a
EN DN 25 PN 40 type F, with recess	280 (11)	7.4 (67)	320 (12.6)	9.4 (21)	490 (19.3)	16.3 (36)	n/a	n/a	n/a	n/a
EN DN 25 PN 100 type B1, raised face (RF)	300 (10.1)	10.1 (22)	340 (13.4)	12.1 (27)	490 (19.3)	18.8 (41)	n/a	n/a	n/a	n/a
EN DN 25 PN 100 type D, with groove	300 (10.1)	10 (22)	340 (13.4)	12 (26)	490 (19.3)	18.7 (41)	n/a	n/a	n/a	n/a
EN DN 25 PN 100 type E, with spigot	300 (10.1)	9.5 (21)	340 (13.4)	11.5 (25)	490 (19.3)	18.3 (40)	n/a	n/a	n/a	n/a
EN DN 25 PN100 type F, with recess	300 (10.1)	9.9 (22)	340 (13.4)	11.9 (26)	490 (19.3)	18.7 (41)	n/a	n/a	n/a	n/a
EN DN 40 PN40 type B1, raised face (RF)	280 (11)	9.1 (20)	320 (12.6)	11.1 (24)	470 (18.5)	17.7 (39)	610 (24)	26.9 (59)	n/a	n/a
EN DN 40 PN 40 type D, with groove	280 (11)	8.9 (20)	320 (12.6)	10.9 (24)	470 (18.5)	17.6 (39)	610 (24)	26.8 (59)	n/a	n/a
EN DN 40 PN 40 type E, with spigot	280 (11)	8.6 (19)	320 (12.6)	10.6 (23)	470 (18.5)	17.4 (38)	610 (24)	26.5 (58)	n/a	n/a
EN DN 40 PN 40 type F, with recess	280 (11)	8.8 (19)	320 (12.6)	10.8 (24)	470 (18.5)	17.5 (39)	610 (24)	26.7 (59)	n/a	n/a
EN DN 40 PN 100 type B1, raised face (RF)	360 (14.2)	13.5 (30)	400 (15.7)	15.5 (34)	500 (19.7)	21.5 (47)	610 (24)	30.5 (67)	n/a	n/a
EN DN 40 PN 100 type D, with groove	360 (14.2)	13.4 (30)	400 (15.7)	15.4 (34)	500 (19.7)	21.4 (47)	610 (24)	30.4 (67)	n/a	n/a
EN DN 40 PN 100 type E, with spigot	360 (14.2)	13 (29)	400 (15.7)	15 (33)	500 (19.7)	21.1 (46)	610 (24)	30 (66)	n/a	n/a
EN DN 40 PN 100 type F, with recess	360 (14.2)	13.3 (29)	400 (15.7)	15.3 (34)	500 (19.7)	21.3 (47)	610 (24)	30.3 (67)	n/a	n/a
EN DN 50 PN 40 type B1, raised face (RF)	n/a	n/a	n/a	n/a	470 (18.5)	19.1 (42)	580 (22.8)	27.8 (61)	n/a	n/a
EN DN 50 PN 40 type D, with groove	n/a	n/a	n/a	n/a	470 (18.5)	18.9 (42)	580 (22.8)	27.7 (61)	n/a	n/a
EN DN 50 PN 40 type E, with spigot	n/a	n/a	n/a	n/a	470 (18.5)	18.6 (41)	580 (22.8)	27.4 (60)	n/a	n/a
EN DN 50 PN 40 type F, with recess	n/a	n/a	n/a	n/a	470 (18.5)	18.8 (41)	580 (22.8)	27.6 (61)	n/a	n/a
EN DN 50 PN 100 type B1, raised face (RF)	n/a	n/a	n/a	n/a	540 (21.3)	25.4 (56)	610 (24)	33.5 (74)	n/a	n/a
EN DN 50 PN 100 type D, with groove	n/a	n/a	n/a	n/a	540 (21.3)	25.3 (56)	610 (24)	33.4 (74)	n/a	n/a
EN DN 50 PN 100 type E, with spigot	n/a	n/a	n/a	n/a	540 (21.3)	24.8 (55)	610 (24)	32.9 (72)	n/a	n/a
EN DN 50 PN 100 type F, with recess	n/a	n/a	n/a	n/a	540 (21.3)	25.2 (56)	610 (24)	33.2 (73)	n/a	n/a
EN DN 80 PN 40 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	31.5 (69)	870 (34.2)	71.6 (158)
EN DN 80 PN 40 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	31.3 (69)	870 (34.2)	71.1 (157)
EN DN 80 PN 40 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	30.9 (68)	870 (34.2)	70.7 (156)
EN DN 80 PN 40 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	31.1 (69)	870 (34.2)	70.9 (156)
EN DN 80 PN 100 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	650 (25.6)	40 (88)	890 (35)	79.1 (174)
EN DN 80 PN 100 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	650 (25.6)	39.8 (88)	890 (35)	78.9 (174)
EN DN 80 PN 100 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	650 (25.6)	39.2 (86)	890 (35)	78.3 (173)

Dimensional drawings (continued)

Process connection size and type	FCS500 sensor nominal size DN 10		DN 15		DN 25		DN 50		DN 80	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
EN DN 80 PN 100 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	650 (25.6)	39.6 (87)	890 (35)	78.7 (173)
EN DN 100 PN 40 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73.8 (163)
EN DN 100 PN 40 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73.6 (162)
EN DN 100 PN 40 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73 (161)
EN DN 100 PN 40 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73.3 (162)
EN DN 100 PN 100 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	870 (34.3)	85.2 (188)
EN DN 100 PN 100 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	870 (34.3)	84.8 (187)
EN DN 100 PN 100 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	870 (34.3)	84 (185)
EN DN 100 PN 100 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	870 (34.3)	84.5 (186)
EN DN125 PN40 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	860 (33.9)	78.5 (173)
EN DN 135 PN 40 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	860 (33.9)	78.1 (172)
EN DN 125 PN 40 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	860 (33.9)	77.4 (171)
EN DN 125 PN 40 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	860 (33.9)	77.7 (171)
EN DN 125 PN 100 type B1, raised face (RF)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	880 (34.6)	98 (216)
EN DN 125 PN 100 type D, with groove	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	880 (34.6)	97.6 (215)
EN DN 125 PN 100 type E, with spigot	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	880 (34.6)	96.3 (212)
EN DN 125 PN 100 type F, with recess	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	880 (34.6)	97.1 (214)

L1 dimension and weight with process connections according to JIS B 2220 (AISI 316/AISI 316L)

Process connection size and type	FCS500 sensor nominal size DN 10		DN 15		DN 25		DN 50		DN 80	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
JIS DN 15 10 K	280 (11)	6.3 (14)	320 (12.6)	8.3 (18)	n/a	n/a	n/a	n/a	n/a	n/a
JIS DN 15 20 K	280 (11)	6.5 (14)	320 (12.6)	8.5 (19)	n/a	n/a	n/a	n/a	n/a	n/a
JIS DN 25 10 K	280 (11)	7.4 (16)	320 (12.6)	9.4 (21)	490 (19.3)	16.3 (36)	n/a	n/a	n/a	n/a
JIS DN 25 20 K	280 (11)	7.8 (17)	320 (12.6)	9.8 (22)	490 (19.3)	16.6 (37)	n/a	n/a	n/a	n/a
JIS DN 40 10 K	280 (11)	8.2 (18)	320 (12.6)	10.2 (23)	470 (18.5)	16.9 (37)	620 (24.4)	26.1 (58)	n/a	n/a
JIS DN 40 20 K	280 (11)	8.6 (19)	320 (12.6)	10.6 (23)	470 (18.5)	17.3 (38)	620 (24.4)	26.5 (58)	n/a	n/a
JIS DN 50 10 K	n/a	n/a	n/a	n/a	470 (18.5)	17.5 (39)	600 (23.6)	26.6 (59)	n/a	n/a
JIS DN 50 20 K	n/a	n/a	n/a	n/a	470 (18.5)	17.7 (39)	600 (23.6)	26.7 (59)	n/a	n/a
JIS DN 80 10 K	n/a	n/a	n/a	n/a	n/a	n/a	570 (22.4)	27.9 (62)	880 (34.6)	68.7 (151)
JIS DN 80 20 K	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	30.4 (67)	880 (34.6)	71 (156)
JIS DN 100 10 K	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	69.8 (154)
JIS DN 100 20 K	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73.4 (162)
JIS DN 125 10 K	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	73.5 (162)
JIS DN 125 20 K	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	850 (33.5)	79.7 (176)

L1 dimension and weight with process connections according to NPT internal thread

Process connection size and type	FCS500 sensor nominal size DN 10		DN 15		DN 25		DN 50		DN 80	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
3/8" NPT	300 (11.8)	5.4 (12)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
1/2" NPT	300 (11.8)	5.4 (12)	340 (13.4)	7.4 (16)	n/a	n/a	n/a	n/a	n/a	n/a
3/4" NPT	300 (11.8)	5.3 (12)	340 (13.4)	7.3 (16)	n/a	n/a	n/a	n/a	n/a	n/a

Flow Measurement

SITRANS FC (Coriolis)


Flowmeter systems / SITRANS FC520/FC540

Dimensional drawings (continued)

L1 dimension and weight with process connections according to G internal thread

Process connection size and type	FCS500 sensor nominal size DN 10		DN 15		DN 25		DN 50		DN 80	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
G 3/8"	300 (11.8)	5.4 (12)	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
G 1/2"	300 (11.8)	5.4 (12)	340 (13.4)	7.4 (16)	n/a	n/a	n/a	n/a	n/a	n/a
G 3/4"	300 (11.8)	5.3 (12)	340 (13.4)	7.3 (16)	n/a	n/a	n/a	n/a	n/a	n/a

Drawings, dimensions and weight for FCS500 sensors (hygienic versions)

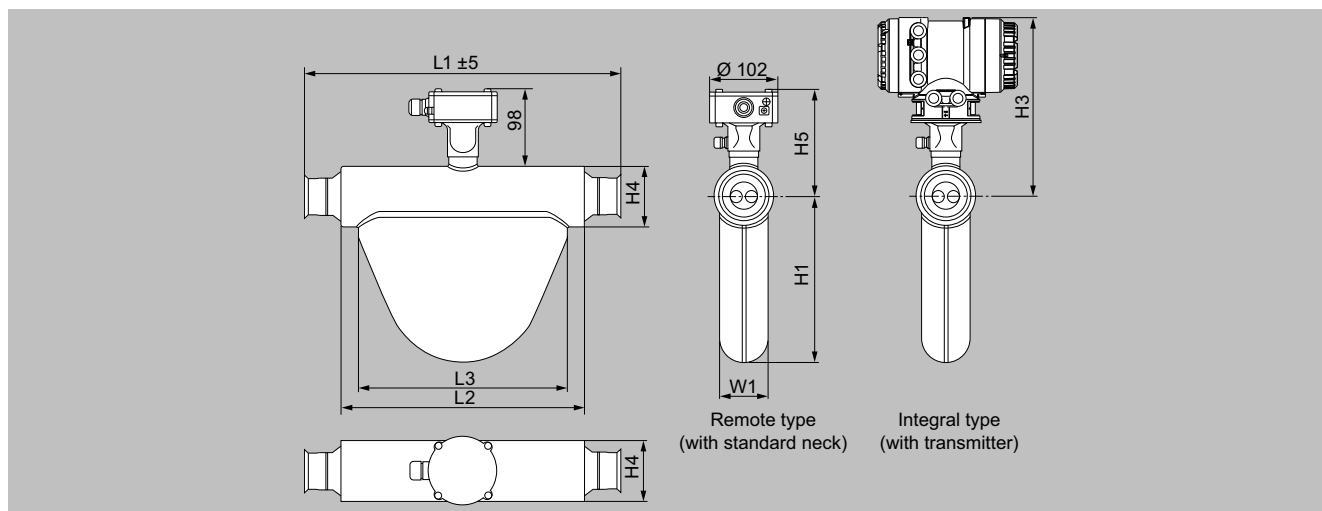

Dimensions in mm

FCS500 sensor dimensions (hygienic versions)

Nominal size	L2	L3	H1	H3	H4	H5	W1
Dimensions in mm (inch)							
DN 10	190 (7.5)	165 (6.5)	117 (4.6)	268 (10.6)	56 (2.2)	138 (5.4)	42 (1.7)
DN 15	227 (8.9)	195 (7.7)	145 (5.7)	277 (10.9)	71 (2.8)	148 (5.8)	50 (2)
DN 25	361 (14.2)	310 (12.2)	245 (9.6)	289 (11.4)	90 (3.5)	159 (6.3)	72 (2.8)
DN 50	455 (17.9)	400 (15.7)	333 (13.1)	296 (11.7)	102 (4)	167 (6.6)	96 (3.8)

Overall length L1 and weight

The overall length of the sensor depends on the selected process connection (type and size). The following tables list the overall length and weight as functions of the individual process connection.

The weights in the tables are for the remote type. Additional weight for the compact type: up to 3.2 kg (7.1 lb)

L1 dimension and weight with threaded hygienic process connections according to DIN 11851

Process connection size and type	FCS500 sensor nominal size DN 10		DN 15		DN 25		DN 50	
	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
DIN 11851, DN 25	280 (11)	5.4 (12)	320 (12.6)	7.4 (16)	n/a	n/a	n/a	n/a
DIN 11851, DN 40	290 (11.4)	5.5 (12)	330 (13)	7.5 (17)	490 (19.3)	14.3 (32)	n/a	n/a
DIN 11851, DN 50	n/a	n/a	n/a	n/a	480 (18.9)	14.4 (32)	610 (24)	23.4 (52)
DIN 11851, DN 65	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	23.4 (52)
DIN 11851, DN 80	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	23.8 (52)

Dimensional drawings (continued)

L1 dimension and weight with hygienic clamp process connections according to DIN 32676 Series A

Process connection size and type	FCS500 sensor nominal size		DN 15		DN 25		DN 50	
	DN 10 L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
DIN 32676 series A, DN 25	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	n/a	n/a	n/a	n/a
DIN 32676 series A, DN 40	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	470 (18.5)	14 (31)	n/a	n/a
DIN 32676 series A, DN 50	n/a	n/a	n/a	n/a	470 (18.5)	14 (31)	600 (23.6)	22.9 (50)
DIN 32676 series A, DN 65	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	23 (51)
DIN 32676 series A, DN 80	n/a	n/a	n/a	n/a	n/a	n/a	590 (23.2)	23.1 (51)

L1 dimension and weight with hygienic clamp process connections according to DIN 32676 Series C (Tri-clamp)

Process connection size and type	FCS500 sensor nominal size		DN 15		DN 25		DN 50	
	DN 10 L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
DIN 32676 series C, 1"	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	n/a	n/a	n/a	n/a
DIN 32676 series C, 1½"	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	480 (18.9)	14 (31)	n/a	n/a
DIN 32676 series C, 2"	n/a	n/a	n/a	n/a	470 (18.5)	14 (31)	600 (23.6)	22.9 (50)
DIN 32676 series C, 2½"	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	22.8 (50)
DIN 32676 series C, 3"	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	22.9 (50)

L1 dimension and weight with hygienic clamp process connections according to JIS/ISO 2852

Process connection size and type	FCS500 sensor nominal size		DN 15		DN 25		DN 50	
	DN 10 L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)	L1 in mm (inch)	Weight in kg (lb)
JIS/ISO 2852, 1"	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	n/a	n/a	n/a	n/a
JIS/ISO 2852, 1½"	280 (11)	5.2 (11)	320 (12.6)	7.2 (16)	480 (18.9)	14 (31)	n/a	n/a
JIS/ISO 2852, 2"	n/a	n/a	n/a	n/a	470 (18.5)	14 (31)	600 (23.6)	22.9 (50)
JIS/ISO 2852, 2½"	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	22.8 (50)
JIS/ISO 2852, 3"	n/a	n/a	n/a	n/a	n/a	n/a	580 (22.8)	22.9 (50)


Flow Measurement

SITRANS FC (Coriolis)

Flowmeter systems / SITRANS FC520/FC540

Dimensional drawings (continued)

Drawings, dimensions and weight for FCT020 and FCT040 transmitters

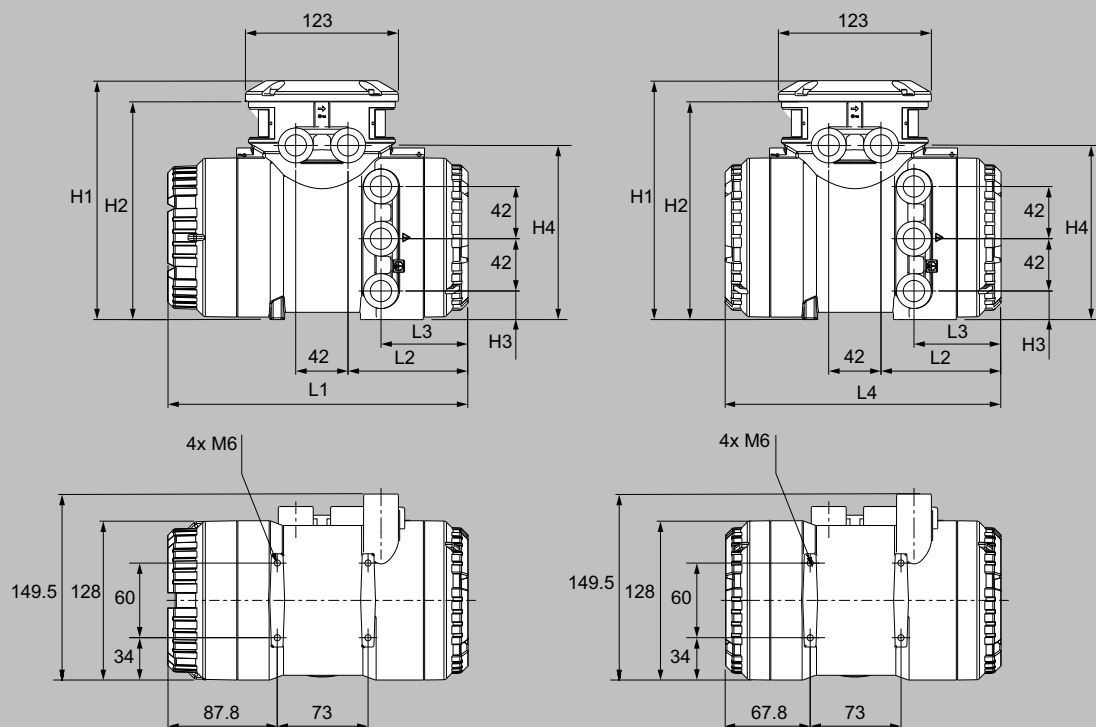


Dimensions of FCT020 or FCT040 transmitter in mm. Transmitter with display shown on the left. Transmitter without display shown on the right.

Dimensions L1 to L4 and H1 to H4 (material options: stainless steel, aluminum)

Material	L1 in mm (inch)	L2 in mm (inch)	L3 in mm (inch)	L4 in mm (inch)	H1 in mm (inch)	H2 in mm (inch)	H3 in mm (inch)	H4 in mm (inch)
Stainless steel	255.5 (10.06)	110.5 (4.35)	69 (2.72)	235 (9.25)	201 (7.91)	184 (7.24)	24 (0.94)	150.5 (5.93)
Aluminum	241.5 (9.51)	96.5 (3.8)	70 (2.76)	221 (8.7)	192 (7.56)	175 (6.89)	23 (0.91)	140 (5.51)

Dimensional drawings (continued)

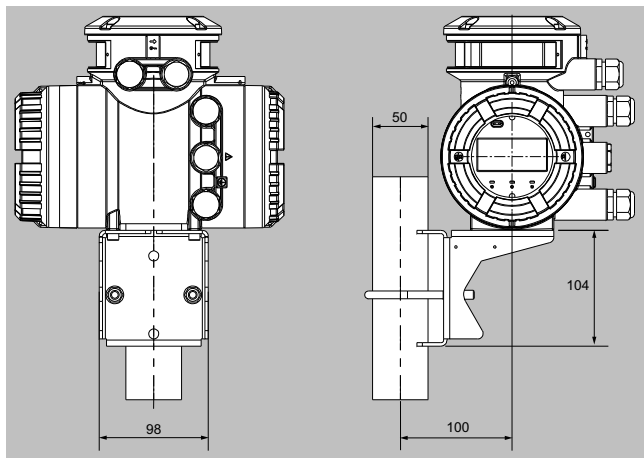


Dimensions of transmitter in mm, attached to mounting bracket.

Transmitter weights

Design type	Transmitter enclosure material	Weight in kg (lb)
Remote	Cast aluminum	4.2 (9.3)
	CF-8M stainless steel	12.5 (27.6)

Connecting cable dimensions and weights

Standard cable

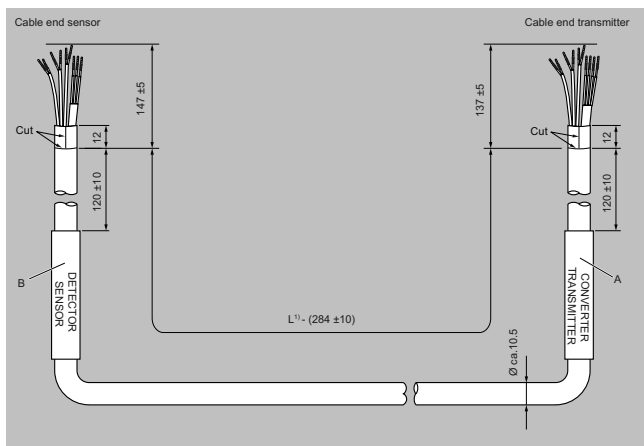


Dimensions in mm. Standard terminated cable. A and B are factory-fitted labels.

Option code	Cable length, L	Cable color
L51	5 m (16.4 ft)	Non-Ex: gray / Ex: blue
L54	10 m (32.8 ft)	
L57	15 m (49.2 ft)	
L60	20 m (65.6 ft)	
L63	30 m (98.4 ft)	

Weight of cable ≤ 0.200 kg/m (0.134 lb/ft)

Standard cable with steel armored option

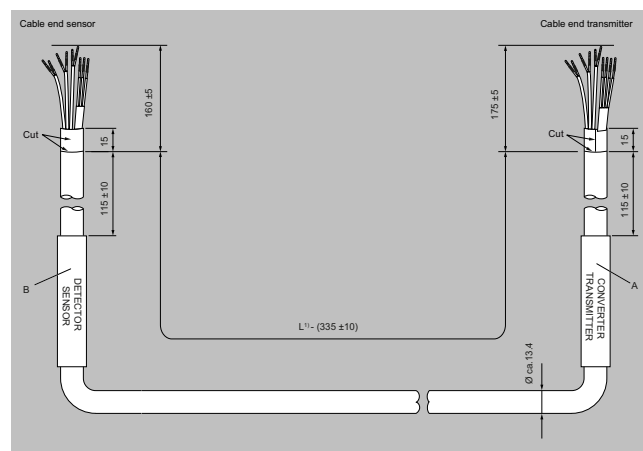


Dimensions in mm. Steel armored terminated cable. A and B are factory-fitted labels.

Option code	Cable length, L	Cable colour
L51 + A20/A21	5 m (16.4 ft)	Blue
L54 + A20/A21	10 m (32.8 ft)	
L57 + A20/A21	15 m (49.2 ft)	
L60 + A20/A21	20 m (65.6 ft)	
L63 + A20/A21	30 m (98.4 ft)	

Weight of cable ≤ 0.300 kg/m (0.202 lb/ft)

Fire retardant cable

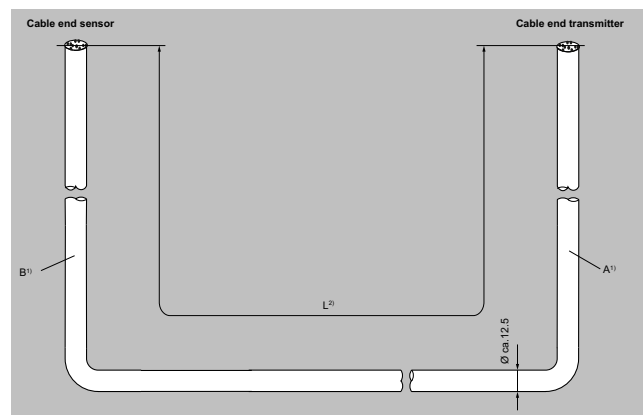

Dimensions in mm. Fire retardant unterminated cable. Labels A and B are supplied loose with termination kit.

Option code	Cable length, L	Cable colour
L71	5 m (16.4 ft)	Gray
L74	10 m (32.8 ft)	
L77	15 m (49.2 ft)	
L80	20 m (65.6 ft)	
L83	30 m (98.4 ft)	

Weight of cable ≤ 0.270 kg/m (0.181 lb/ft)